

STANDARD SPIRE MOUNTING POSITION OPTIONS

MOUNTING POSITION (1-10) \_\_\_\_\_

-SEE SHEETS 2 FOR EACH CORRESPONDING POSITION OPTIONS

ROOF PITCH(S) \_\_\_\_\_

-SEE SHEET 3 TO DETERMINE ROOF SLOPE.

ROOFING MATERIAL THE SPIRE IS SITTING ON

ARCHITECTURAL SHINGLES  
 IF OTHER THAN ARCHITECTURAL  
 ROOF SHINGLES, PLEASE  
 SPECIFY MANUFACTURER &  
 PROFILE OF ROOFING MATERIAL


STANDING SEAM PANELS\*\*  
 MANUFACTURER: \_\_\_\_\_  
 SEAM HEIGHT: \_\_\_\_\_  
 SEAM SPACING: \_\_\_\_\_

CLAY TILE SYSTEM\*\*  
 -SEE SHEET 3 FOR OPTIONS  
 MANUFACTURER: \_\_\_\_\_  
 TILE SYSTEM HEIGHT: \_\_\_\_\_  
 TILE SPACING: \_\_\_\_\_

SLATE TILE SYSTEM\*\*  
 -SEE SHEET 3 FOR OPTIONS  
 MANUFACTURER: \_\_\_\_\_  
 TILE SYSTEM HEIGHT: \_\_\_\_\_  
 TILE SPACING: \_\_\_\_\_

CONCRETE TILE SYSTEM\*\*  
 -SEE SHEET 3 FOR OPTIONS  
 MANUFACTURER: \_\_\_\_\_  
 TILE SYSTEM HEIGHT: \_\_\_\_\_  
 TILE SPACING: \_\_\_\_\_


\*\*MAY REQUIRE BASE MODIFICATION CHARGES.

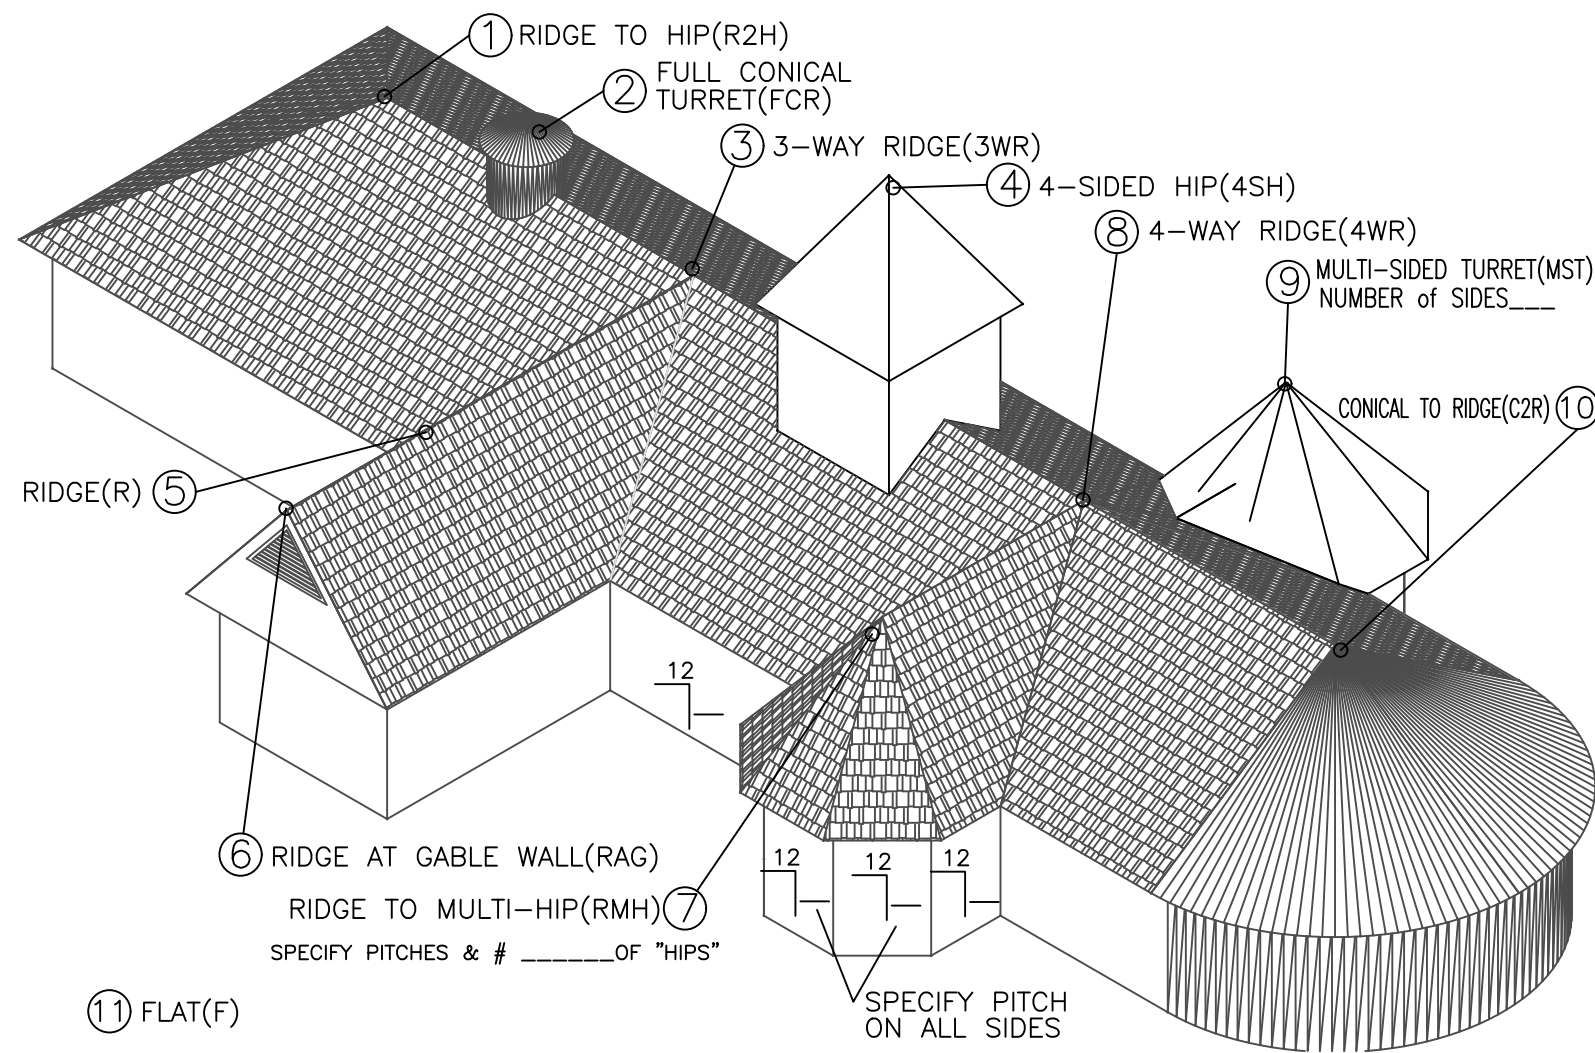


APPROVED BY: \_\_\_\_\_  
 NAME: \_\_\_\_\_  
 DATE: \_\_\_\_\_

STANDARD SPIRE MOUNTING POSITION OPTIONS


① RIDGE TO HIP(R2H)

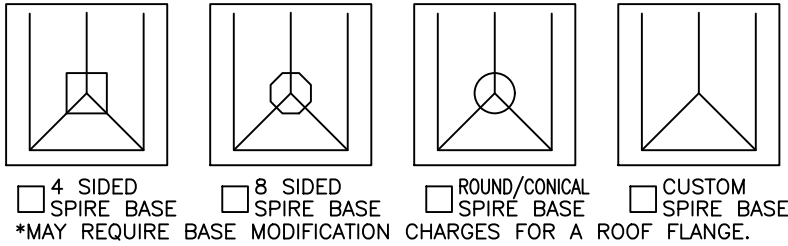


② FULL CONICAL TURRET(FCR)

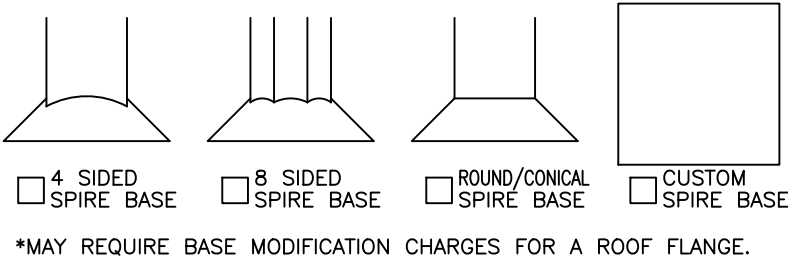


③ 3-WAY RIDGE(3WR)

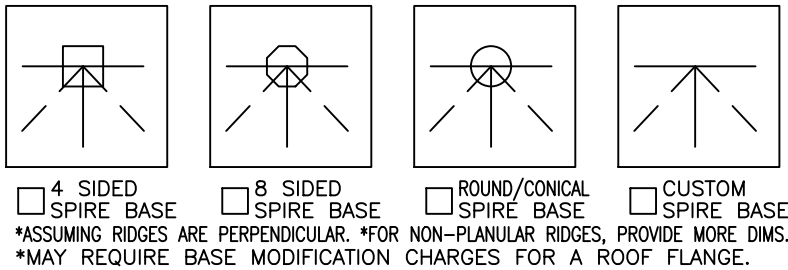


④ 4-SIDED HIP(4SH)

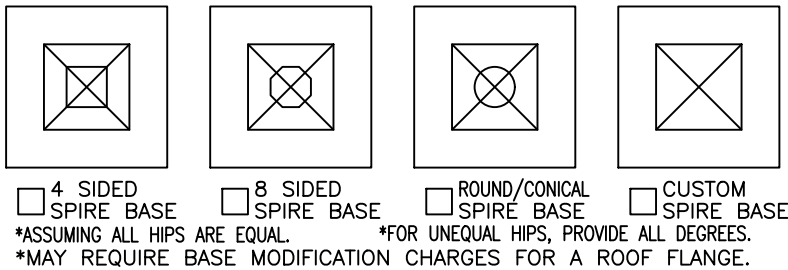


⑤ RIDGE(R)

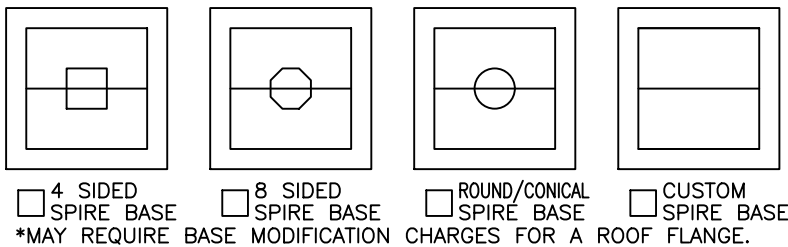


⑥ RIDGE AT GABLE END(RAG)

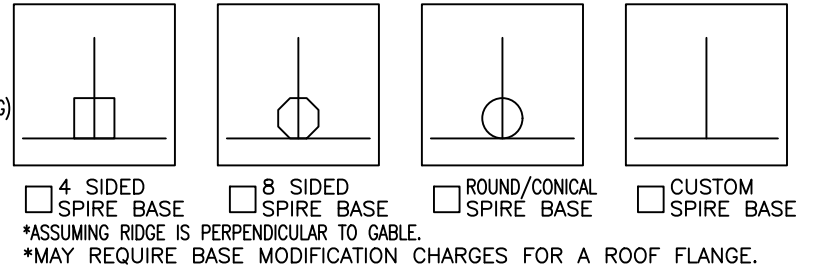


⑦ RIDGE TO MULTI-HIP(RMH)

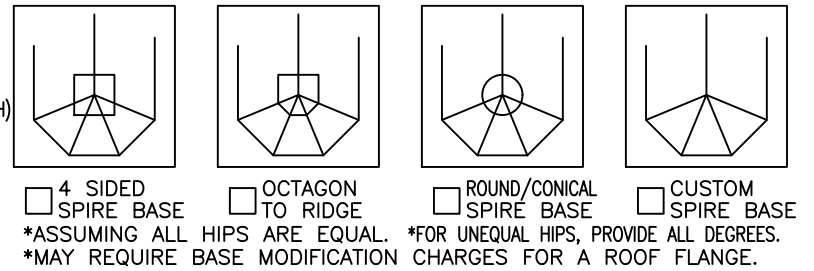


⑧ 4-WAY RIDGE(4SH)

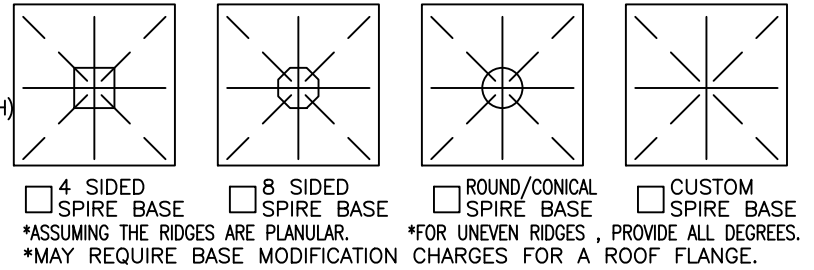


⑨ MULTI-SIDED TURRET(MST)

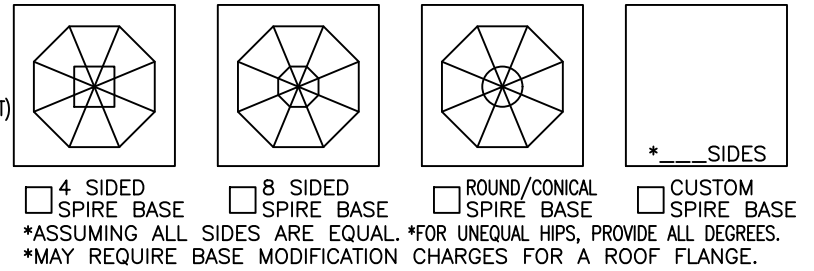


⑩ CONICAL TO RIDGE(C2R)

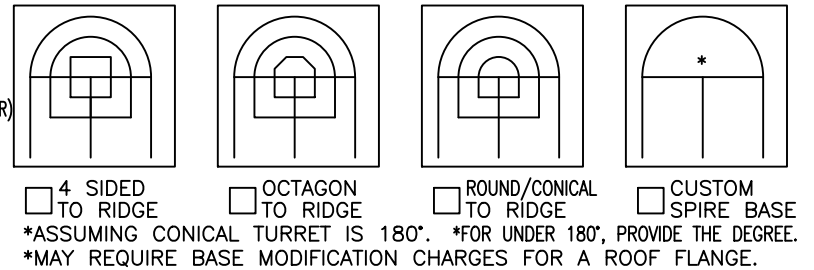

C  CLAY TILE SYSTEM\*\*

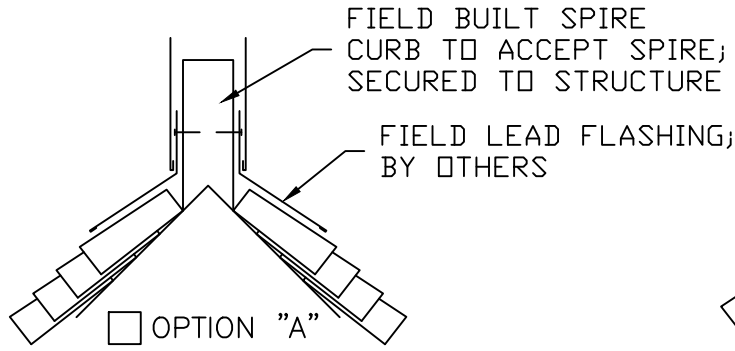


- NO BASE MODIFICATION CHARGES.
- SPIRE CAN BE INSTALLED AFTER TILE

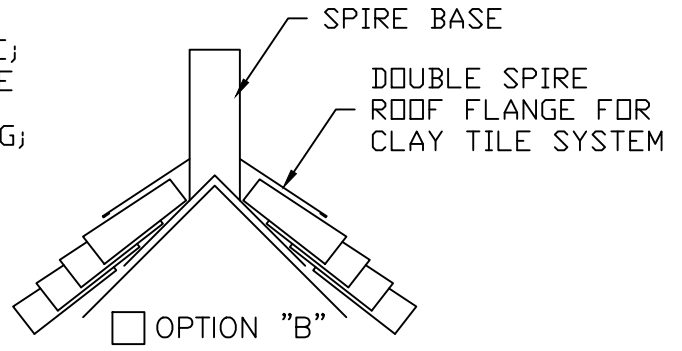


- WITH BASE MODIFICATION CHARGES.
- SPIRE HAS TO INSTALLED BEFORE TILE

D  SLATE TILE SYSTEM\*\*

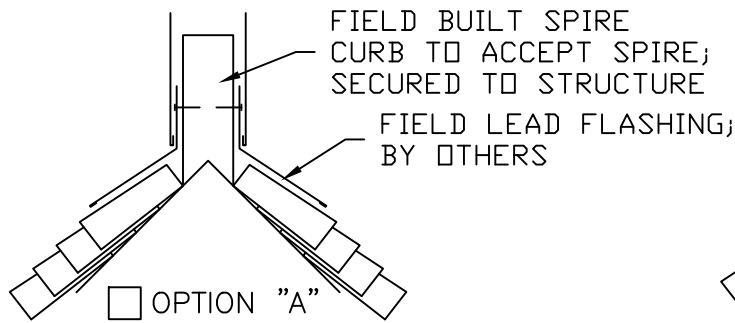


- NO BASE MODIFICATION CHARGES.
- SPIRE CAN BE INSTALLED AFTER TILE

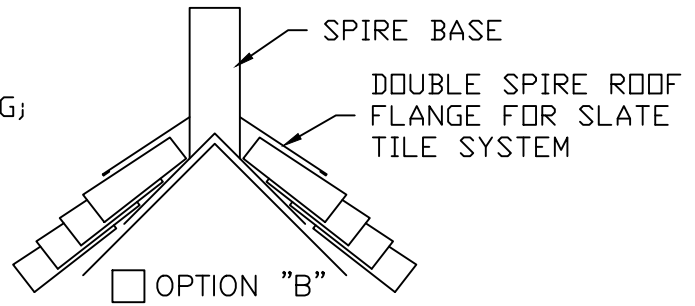


- WITH BASE MODIFICATION CHARGES.
- SPIRE HAS TO INSTALLED BEFORE TILE

E  CONCRETE TILE SYSTEM\*\*

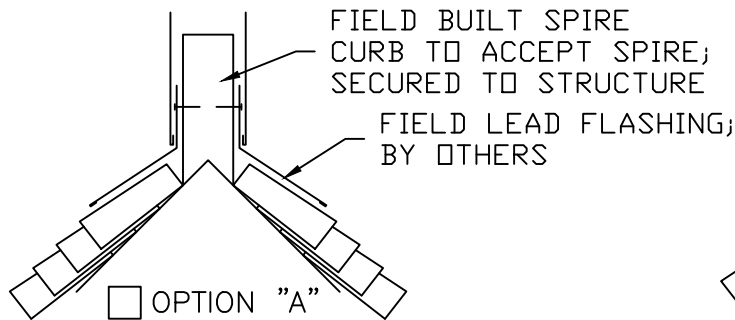

- NO BASE MODIFICATION CHARGES.
- SPIRE CAN BE INSTALLED AFTER TILE

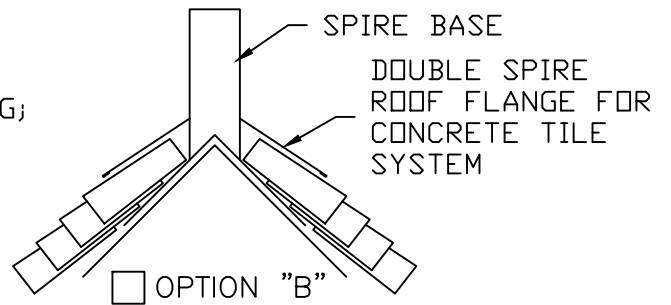

- WITH BASE MODIFICATION CHARGES.
- SPIRE HAS TO INSTALLED BEFORE TILE

\*\*MAY REQUIRE BASE MODIFICATION CHARGES.

